

1100 watt universal reciprocating saw with accelerator trigger switch

RS 11-28



1100 watt universal reciprocating saw with accelerator trigger switch

- + VV electronic control: with constant stroke control, soft start with continuous speed control trigger
- + Universal saw blade holder: for an easy saw blade exchange
- + Tool-free saw blade change with ejection function
- + Saw blade can be turned through 180°
- + Detachable, swivelling saw support, depth adjustable tool free
- + Ergonomically designed, non-slip, soft grip handle
- + Rubberised gear case for a secure and pleasant grip
- + Dust- and splash-proof housing
- + Integrated LED light

Order number 432.776

0-2700 opm
28 mm
1100 watt
600 watt
230 mm
20 mm
4,0 m
3,6 kg

Standard equipment	
1 assortment of saw blades	1 set
1 carrying case	436.607



Accessories

Carrying case



Impact-resistant plastic carry case for the RS 11-28.

Order number 436.607

Technical attributes	
QTY/PKG	1

Reciprocating saw blades for metal and sheet material

Technical attributes	
Teeth per inch	6
Length in mm	150
QTY/PKG	5

Reciprocating saw blade for 2-8 mm cuts in stainless steel, metal/steel, sheet steel, steel tubing, open/closed sections.

Reciprocating saw blades for metal and sheet material



Order number 462.055



Technical attributes	
Teeth per inch	18
Length in mm	150
QTY/PKG	5

Reciprocating saw blade for 1.5-3 mm deep cuts in stainless steel, metal/steel, sheet steel tubing, open/closed sections.



Accessories

Reciprocating saw blades for metal and sheet material

Order number 462.071



Technical attributes	
Teeth per inch	14
Length in mm	230
QTY/PKG	5

Reciprocating saw blade for 2-8 mm cuts in metal/steel, sheet steel, steel tubing, open/closed sections and for 3-180 mm cuts in timber/pallet manufacture.

Reciprocating saw blades for metal, timber, plastic materials

Order number 462.098



Technical attributes	
Teeth per inch	6
Length in mm	150
QTY/PKG	5

Reciprocating saw blade for 6-100 mm cuts in MDF, timber containing nails, for building renovation/window frames, metal/steel, glass-fibre reinforced plastics/epoxy, curved cuts.

Reciprocating saw blades for metal, timber, plastic materials

Order number 462.101



Technical attributes	
Teeth per inch	10
Length in mm	150
QTY/PKG	5

Reciprocating saw blade for 3-100 mm cuts in timber containing nails, glass-fibre reinforced plastics/epoxy, and for 3-12 mm cuts in stainless steel, metal/steel, steel tubing.



Accessories

Reciprocating saw blades for metal, timber, plastic materials

Order number 462.128



Technical attributes	
Teeth per inch	10
Length in mm	230
QTY/PKG	5

Reciprocating saw blade for cuts of between 3-190 mm in timber containing nails, pallet manufacture, glass-fibre reinforced plastics/epoxy, and for 3-12 mm cuts in metal/steel, steel tubing.

Reciprocating saw blades for demolition

Order number 462.136



Technical attributes	
Teeth per inch	10
Length in mm	230
QTY/PKG	5

Demolition blade for accurate angular cuts up to 180 mm in hardwood, MDF, timber containing nails, for building renovation/window frames, glass-fibre reinforced plastics/epoxy.

Reciprocating saw blade for insulation material

Order number 462.144



Technical attributes	
Length in mm	300
QTY/PKG	2

Reciprocating saw blade for cuts into insolation material, mineral wool, foam, polystyrene (Styrofoam, Styrodur) leather, rubber, paper, carton and carpet.

Reciprocating saw blades for timber

Order number 462.152



Technical attributes	
Teeth per inch	10
Length in mm	230
QTY/PKG	2

Reciprocating saw blade for very clean 6-150 mm cuts in plywood, multiplex/blockboard, MDF, laminated panels.



Accessories

Reciprocating saw blade for pallets






Technical attributes	
Teeth per inch	10
Length in mm	230
QTY/PKG	5

Reciprocating saw blade for 30-100 mm cuts for pallet manufacture.

Reciprocating saw blades assortment for plastic/wood/metal

Order number 462.179

Order number 462.160

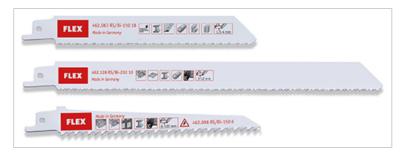

Technical attributes		
QTY/PKG	3	

Set consisting of: 1 reciprocating saw blade for 1.5-3 mm deep cuts in stainless steel, metal/steel, sheet steel, steel tubing, open/closed sections 1 reciprocating saw blade for 6-100 mm cuts in MDF, timber containing nails, for building renovation//window frames, metal/steel, glass-fibre reinforced plastics/epoxy, curved cuts. 1 reciprocating saw blade for 3-190 mm cuts in timber containing nails, pallet manufacture, glass-fibre reinforced plastics/epoxy, and for 3-12 mm cuts in metal/steel, steel tubing.